





**DALLAS SPECIALTY
& MFG. CO.**

1161 RUGGLES ST - GRAND PRAIRIE, TX-75050

1-800-222-5644 / FAX 972-641-8488 www.DALSPC.com

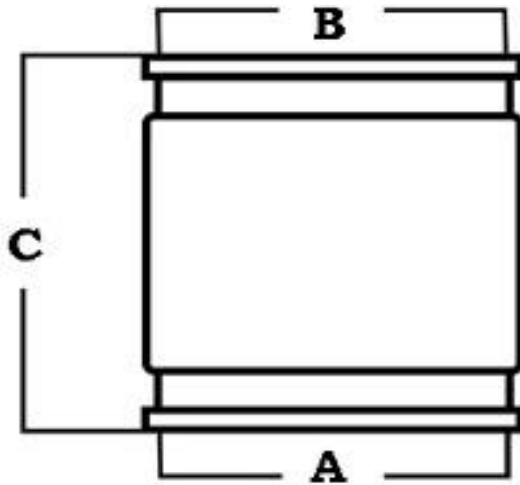

Weight	6 #	DESCRIPTION: 16"CI/PVC x 16"CI/PVC FLEXIBLE PIPE COUPLING									
Temp Rating	135 degrees F										
Pressure	2-3# MAX										
Material	Flexible PVC	PART # DS56-1616									
Install Torque	60" Lbs.										
Meets ASTM	C1173 & D5926	 <table border="1" data-bbox="535 1258 945 1380"> <tr> <td>OD 16.3"</td> <td>OD 16.3"</td> <td></td> </tr> <tr> <td>A dim</td> <td>B dim</td> <td>C dim-lgth</td> </tr> <tr> <td>15.5"ID</td> <td>15.5"ID</td> <td>6.5"</td> </tr> </table>	OD 16.3"	OD 16.3"		A dim	B dim	C dim-lgth	15.5"ID	15.5"ID	6.5"
OD 16.3"	OD 16.3"										
A dim	B dim		C dim-lgth								
15.5"ID	15.5"ID		6.5"								
THICKNESS	3 / 8 "										
Band Series	300 SERIES SS										
Band Part #s	(2) DS-248										



PART FLEXIBILITY ALLOWS FOR + OR - 5% - ACCOMODATING ON ENDS "A" & "B" 14.8"PIPE OD & UP TO 16.27 PIPE OD'S

Part requires (2) 300 Stainless clamps for installation.
Additional specification sheets available for clamps.