

SPECIFICATIONS

SPUDNUTS[®] COMPRESSION SEAL/GASKET

Part# **DS66U-605**


6" SERVICE WEIGHT HUB x SCH40 DWV or SCH40 STEEL or XHCI

PROPERTY OF DALLAS SPECIALTY & MFG CO.

Dallas Specialty Spudnuts[®]

Flexible seals for compression sealing of sewer pipe joints, DWV connections such as hubs, sockets, bells & spigots can be installed:

1. Using a push style installation, insert Spudnut into spigot end of pipe when connection is size to size and Spudnut is less than 3/8" thick.
2. Using a stab style installation, insert Spudnut into soil pipe hub or cast iron tap saddle in a size to size connection.
3. Using a drive style installation, insert Spudnut into pipe when Spudnut has a 3/8" or greater wall thickness

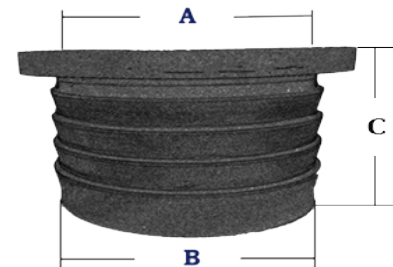

Coupling Made to ID Specifications

A SIDE (ID)	B SIDE (OD)	C SIDE HEIGHT
6.50"	7.00"	2.25"

DETAILS:

- Compression sealing of sewer pipe joints, DWV (Drain, Waste and Vent) connections such as hubs, sockets, bells & spigots
- A variety of sizes for your Concrete, Clay, SDR35, and Service Weight Pipe Connections
- Provides a seal for a wide variety of conditions and various piping systems
- Made of Poly Vinyl Chloride (PVC) for lasting durability and maximum flexibility
- Phthalates Free Resin
- Many sizes to fit multiple types of pipe
- Meets ASTM D-5926 C-564
- Suitable for Underground and Under Slab.



DALLAS SPECIALTY & MFG. CO.

1161 RUGGLES ST GRAND PRAIRIE, TX 75050

972-641-8444 * 1-800-222-5644 * fax 972-641-8488

www.dallaspecialty.com